

T-GRID SUSPENSION SYSTEMS

TECHNICAL DATA SHEET



Features and Benefits:



Maximum economy and design simplicity



Corrosive resistance, humidity resistance.



Lock design makes the grid module demountable without tools.



Safe, fast and simple to install & easily accessible.



Environmentally friendly and recyclable.

Applications

- For Jawdah's Metal & Gypsum Ceiling Tiles
- Auditoriums, cinemas, halls, computer rooms, hospitals, shops, offices, utility rooms, airports, exhibition centers, conference rooms & studios...etc.




Product Specifications

Material	Hot Dipped Galvanized Iron comply with American ASTM A653M. Cap is made of either: • Pre-Painted Galvanized Iron comply with American ASTM A653M • Aluminum.
Type	T-24 & T-15
Color	9 main standard colors & other colors upon client request.
Fire Rating (Raw Material)	Class A1
Resistivity	Corrosive resistance ,Humidity resistance ,offers appropriate load-carrying capacities for Tiles.
Compatibility	• Square edge ceiling tiles (lay-on) • Lay-in ceiling tiles • Tegular edges ceiling tiles • Clip-in ceiling tiles
Sizes	Metric & Imperial
Thickness	0.28mm Regular 0.32mm Heavy duty
Finish	Face(cap): Pre-Painted Galvanized Iron, also available in Anti-Bacterial paint upon request. • Aluminum.

System Contents (Components)

1. Main-Tee (3600MM) .
2. Cross-Tee (120) (1200MM).
3. Cross-Tee (60) (600MM).
4. WALL - ANGLE (L-Shape/W-Shape/U-shape).
5. Suspension Accessories (Rod Hangers, Adjustment Clips & Anchor Bolts).

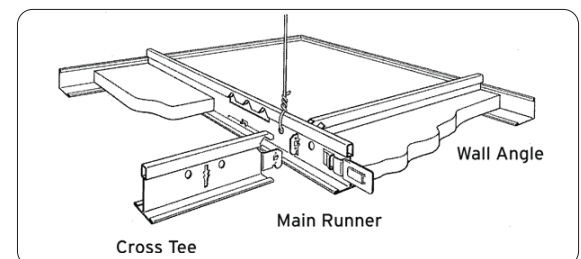

Supplier and Manufacturer: JAWDAH INDUSTRIAL COMPANY LTD.

Country of Origin: Kingdom of Saudi Arabia



JAWDAH

شركة جودة الصناعة المحدودة
Jawdah Industrial Co. Ltd.

Meed Building, Dabab Street, Riyadh, KSA

T: +966 11 216 6616 F: +966 11 216 6606

E: jawdah@jawdah.sa | www.jawdah.sa


T-GRID SUSPENSION SYSTEMS

T-24 Type Suspension System (Regular / Heavy Duty)

ITEM	SYSTEM	LENGTH	CROSS SECTION (SIZE)(mm)	REGULAR SYS.THICKNESS (mm)	HEAVY DUTY SYS.THICKNESS (mm)	PACKING	PHOTO
Main-Tee	IMPERIAL	12FT (3660MM)	24*38 ; 24*32	0.28	0.32	30 pcs/carton	
	METRIC	3600MM	24*38 ; 24*32	0.28	0.32		
Cross-Tee (120)	IMPERIAL	4FT (1220MM)	24*26	0.28	0.32	60 pcs/carton	
	METRIC	1200MM	24*26	0.28	0.32		
Cross-Tee (60)	IMPERIAL	2FT (610MM)	24*26	0.28	0.32	75 pcs/carton	
	METRIC	600MM	24*26	0.28	0.32		
Wall Angle (L-Shape)	STANDARD	3000 ; 3600MM	20*20 ; 24*24	0.4	0.4	50 pcs/carton	
Wall Angle (W-Shape)	STANDARD	3000 ; 3600MM	18*18+8(Drop)	0.4	0.4	50 pcs/carton	
Wall Angle (U-Shape)	STANDARD	3000 ; 3600MM	20*38*20 ; 18*18*18	0.4	0.4	50 pcs/carton	

T-15 Type Suspension System (Regular / Heavy Duty)


ITEM	SYSTEM	LENGTH	CROSS SECTION (SIZE)(mm)	REGULAR SYS.THICKNESS (mm)	HEAVY DUTY SYS.THICKNESS (mm)	PACKING	PHOTO
Main-Tee	IMPERIAL	12FT (3660MM)	15*38	0.28	0.32	30 pcs/carton	
	METRIC	3600MM	15*38	0.28	0.32		
Cross-Tee (120)	IMPERIAL	4FT (1220MM)	15*25	0.28	0.32	60 pcs/carton	
	METRIC	1200MM	15*25	0.28	0.32		
Cross-Tee (60)	IMPERIAL	2FT (610MM)	15*25	0.28	0.32	75 pcs/carton	
	METRIC	600MM	15*25	0.28	0.32		
Wall Angle (L-Shape)	STANDARD	3000 ; 3600MM	20*20 ; 24*24	0.4	0.4	50 pcs/carton	
Wall Angle (W-Shape)	STANDARD	3000 ; 3600MM	18*18+8(Drop)	0.4	0.4	50 pcs/carton	
Wall Angle (U-Shape)	STANDARD	3000 ; 3600MM	20*38*20 ; 18*18*18	0.4	0.4	50 pcs/carton	



Main-Tee



Cross-Tee



Wall Angle
(L-Shape)



Wall Angle
(W-Shape)



Wall Angle
(U-Shape)