PLAIN GRG CEILING TILES

PVC Laminated / Painted LAY-ON, LAY-IN / TEGULAR

TECHNICAL DATA SHEET



Product Specifications	
Material	GRG Fiber Glass Rienforced gypsum tiles.
Available Thickness	12.5 mm
Types	Fire & Moisture resistance tiles.
Edge Types	Square (Lay-On) /LAY-IN / LAY-IN TEGULAR edge .
Suspension Systems	T-24 & T-15
Finish	PVC laminated/ Painted ,also avalabile in Anti-Bacterial paint upon request) & backside enhanced with Aluminum Foil
Light Reflectance	Light Reflectance more than 0.8 According to BS 8493:2008
Water Vapour transmission	Water Vapour transmission According to ASTM E 96-00
Thermal Insulation	Acceptable as per british standard BS EN 1602:1997
Weight	10.25 Kg/M2.
Minimum Core Denisity	820 Kg/M3.
Sizes	1) 600*600mm (PVC Laminated/Painted GRG) (Fiber Glass Rienforced Gypsum) Ceiling tiles LAY-ON, LAY-IN/TEGULAR (Plain) (Metric / Imperial).
	2) 600*1200mm (PVC Laminated/Painted GRG (Fiber Glass Rienforced Gypsum) Ceiling tiles LAY-ON (Plain) (Metric).

System Contents (Components)

- 1. PVC Laminated/Painted GRG (Fiber Glass Rienforced Gypsum) Ceiling tiles LAY-ON, LAY-IN / TEGULAR (Plain).
- 2. Tee-Grid Suspension system (T24 /T15)(Main Tee, Cross Tee 120, Cross 60, Wall angle).
- 3. Suspension Accessories (Rod Hangers, Adjustment Clips & Anchor Bolts).

Features and Benefits









High-quality properties of non-combustibility and mechanical stability.

Easy to clean, durable, easy to install.

Environmentally friendly and recyclable.










Fire & moisture resistance, light reflection, impact resistance.

Applications

Wide range for usage/application area (halls, computer rooms, utility rooms, hospitals, shops, offices, airports, exhibition centers...etc).



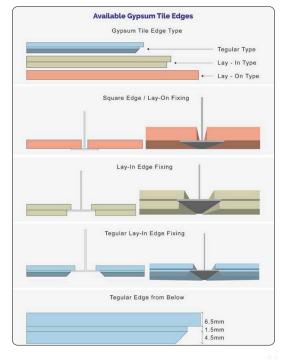

Supplier and Manufacturer: JAWDAH INDUSTRIAL COMPANY LTD.

Country of Origin: Kingdom of Saudi Arabia



Meed Building, Dabab Street, Riyadh, KSA **T:** +966 11 216 6616 **F:** +966 11 216 6606 **E:** jawdah@jawdah.sa | www.jawdah.sa